

AS-78G-21

LTE/Cellular Gain Whip Antenna

03/02/2017 v.1




- High gain whip
- Covers 6 major cellular bands including LTE
- Fits a range of Panorama bases

The AS-78G-21 offers 5dBi peak gain at 700MHz, 4dBi peak gain at 800MHz and fallback coverage of 2dBi peak gain across 900/1800/1900 and 2100MHz.


Consisting of a stainless steel whip and robust polyamide moulding the antenna is suitable for a variety of applications.

The AS-78G-21 is compatible with a variety of bases including the EB, MAR, GPSK and GPSB.

Technical Drawing

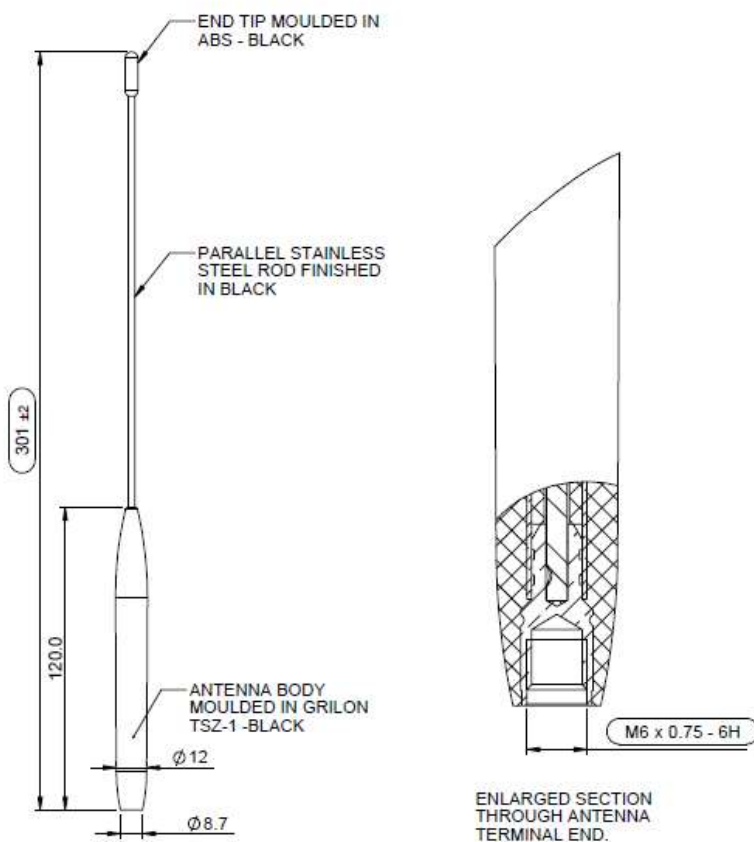


Typical VSWR*

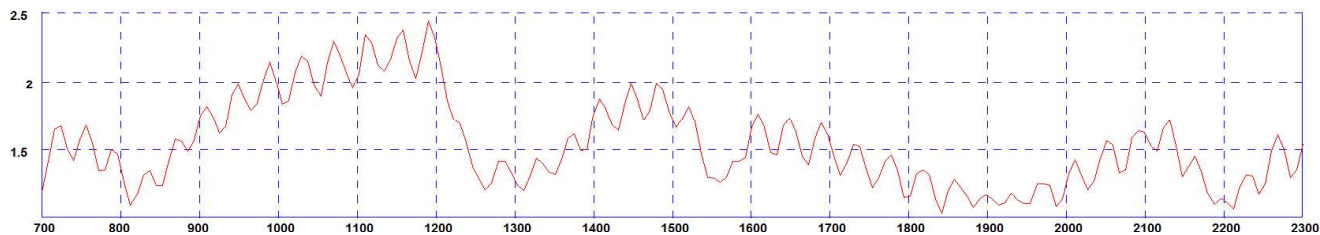


*VSWR measured on MARU base 1x1m groundplane with 2m of RG174 cable


Typical 750MHz H-Plane




Typical 850MHz H-Plane



Typical 1800MHz H-Plane



Typical 2100 MHz H-Plane



Part No.

AS-78G-21

Electrical Data

Frequency Range (MHz)	698-960, 1710-2170	
Frequency Band	LTE 700, AMPS850, GSM900, GSM1800, PCS1900, AWS & 3G UMTS	
Peak	698-800MHz	5dBi
Gain:	801-896MHz	4dBi
Isotropic	896-960/1710-2170MHz	2dBi
Polarisation	Vertical	
Pattern	Omni-directional	
Impedance	50Ω	
Max Input Power (W)	60	

Mechanical Data

Dimen- sions (mm)	Whip Length	301 (11.9")
	Diameter	12 (0.47")
Operating Temp (°C)	-30°/+70°C (-22°/158°F)	
Material	Polyamide & Stainless Steel	
Colour	Black	
Mounting	M6x0.75	



Panorama Antennas Ltd
Frogmore, London, SW18 1HF, United Kingdom

T: +44 (0)20 8877 4444
F: +44 (0)20 8877 4477
E: sales@panorama-antennas.com
www.panorama-antennas.com

Waiver: The data given above is indicative of the performance of the product/s under particular conditions and does not imply a guarantee of performance. These specifications are subject to change without notice.
Copyright © Panorama Antennas Ltd. All rights reserved.